




# CLUTCHTECH



## TSB - SAC01

### Fitment of a Self Adjusting Clutch

When fitting a Self Adjusting Clutch (SAC) it is important the bolts are torque in a "star" type fashion or use ClutchPro tool (ACT-SACTOOL). Failing to torque the bolts as recommended (see below picture) can result in the clutch adjusting unevenly causing clearance problems and/or inconsistent pedal feel.

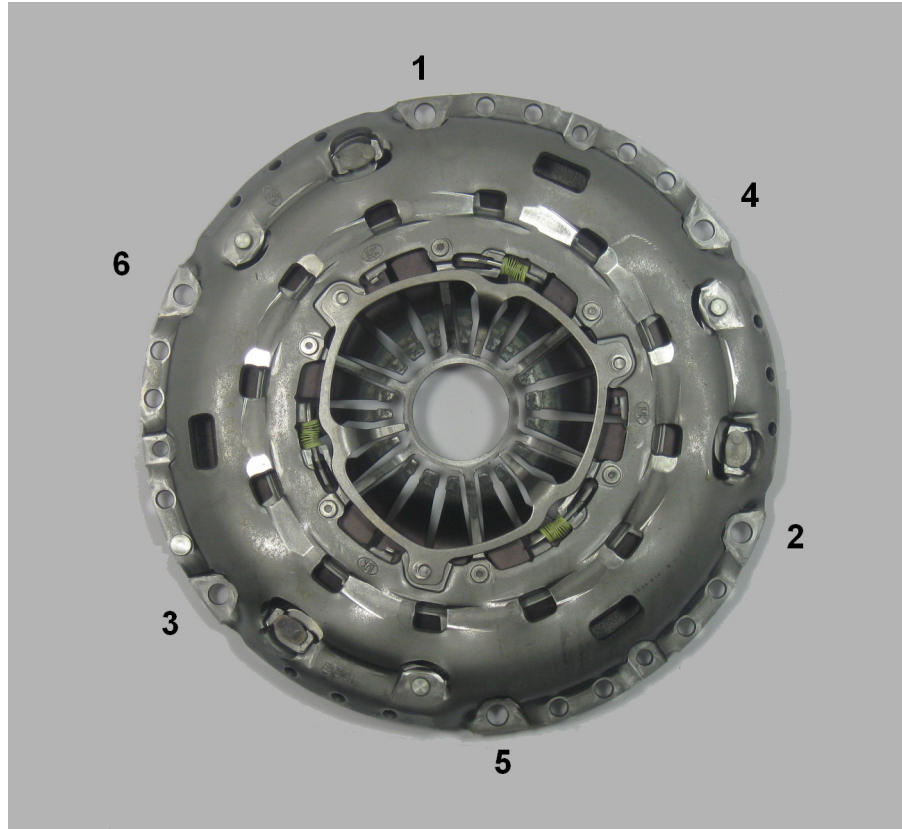

Always ensure the cover is located on the dowel pins (if applicable) prior to tensioning the pressure plate bolts.



#### ACT-SACTOOL

For safe fitting of all SAC Clutches ClutchPro recommends using the Self-Adjusting clutch fitting tool available from your ClutchPro distributor.

Always refer to the manufacture for their recommended torque settings of these bolts.

#### LEADING BRANDS

